

PRODUCTS & SERVICES



TPE
TEXAS
PROCESS
EQUIPMENT

A COMMON SENSE APPROACH TO TECHNOLOGY

PUMPS



EXP air operated diaphragm pumps in sizes thru 3". Cast iron, aluminum, stainless steel, Hastelloy C, polypropylene and PVDF materials of construction. Flows to 275 GPM. Drum pump, flap valve and powder handling versions available. Air operated piston pumps in steel and stainless steel construction for pumping high viscosity materials, capable of discharge pressures to 10,000 psi. Complete line of extrusion packages available. Air system components, including filter/regulator/lubricator combinations.



Submersible pumps: 1" to 6" discharge, heads to 140 ft, 1/6 thru 30 hp. Available in multiple configurations including: corrosion resistant stainless steel pumps, sump/sewage/sludge pumps, trash/non-clog/solids handling pumps, sand pumps, vortex pumps, slurry agitator pumps, grinder/cutter/shredder pumps, and dewatering/utility pumps.



CHEMPUMP

Sealless, leakproof canned motor centrifugal pumps. Available in steel, 316SS, Alloy 20 and Hastelloy C. Nominal hp ratings available from 1 to 150. Temperatures from -400°F to 1,000°F. G series feature more than 100 models in 30 sizes with capacities to 2,000 gpm, heads to 450 ft; system pressures to 5,000 psi. NC series feature ANSI design with self-contained diagnostics. Special canned motor drive options available.

EASTERN

316SS, Alloy 20 and Hastelloy C centrifugal pumps in single and multi-stage design. Single and double seals, flows to 85 gpm, heads to 365 ft. Sealless mag-drive option available.



Sealless, magnetically driven non-metallic gear pumps with absolutely no wetted metallic parts. Available in four sizes with flows to 20 gpm, pressures to 150 psig, and temperatures to 150°F. For medium to highly corrosive clean liquids used in chemical processing, dosing, and water treatment.

ECO

Corrosion resistant gear pumps constructed of 316SS, Alloy 20 and Hastelloy C. Flows to 55 gpm, pressures to 200 psig. Available in packed, single and double seal configurations. Sealless mag-drive option available.



Fybroc

Non-metallic, corrosion resistant, fiberglass reinforced, thermoset vinyl ester/epoxy centrifugal pumps designed for corrosive and other difficult liquids. Available in horizontal ANSI dimensional sealed, mag-drive, close coupled and self priming configurations. Vertical sump pumps in 19 sizes and lengths to 30 feet. Flows to 5,000 gpm, heads to 475 ft.



High pressure, hydraulically actuated diaphragm pumps in cast iron, bronze, 316SS, Hastelloy C and non-metallic construction. Flows to 40 gpm, pressures to 2,500 psig. Excellent for high head pressure, low flow applications. Metering pump available.

Isochem

Sealless, magnetically driven gear and centrifugal pumps constructed of 316SS, Alloy 20 and Hastelloy C. Gear pump flows to 55 gpm, pressures to 225 psig. Centrifugal pump flows to 85 gpm, heads to 365 ft.



Sealless, magnetic drive centrifugal pumps lined in PFA or ETFE. Flows to 325 gpm, heads to 180 ft. Available in close or long coupled designs. Small/OEM packaged, magnetic drive, close coupled centrifugal pumps in molded polypropylene or ETFE, fractional to 3 hp (some with dry run capabilities). Semiconductor Products: Non-metallic bellows pumps for hot and cold etch, chemical blend and transfer, pump controllers, pulsation dampeners, photo resist dispensing systems, spiking pumps.



Modular drum and container pumps in aluminum, 316SS, polypropylene, PVDF and Hastelloy C. Wide selection of electric and pneumatic motors. Sealed and sealless designs available. Tube lengths to 16 feet.

MICROPUMP

Sealless, magnetically driven gear and centrifugal pumps. Flow rates from 0.25 cc/min to 10 gpm. Differential pressures to 200 psig, static pressure from 30" Hg to 5000 psig. Temperatures from -60°F to 400°F. Special modifications available. Excellent for high head pressure, low flow applications including pipeline, densitometer and closed loop sampling, OEM, laboratory, and pilot plants.



PUMPS

**MOYNO® 500
PUMPS**

Progressive cavity pumps in cast iron & 316SS. Buna, EPDM & fluoroelastomer stators. Flow rates to 50 gpm, pressures to 600 psig. Variable speed metering capabilities.

MTH

Regenerative turbine pumps in all iron, bronze fitted and 316SS. Single and multi-stage pumps. Special designs for low NPSHA or high temperature. Flow rates to 100 gpm, discharge heads to 1700 ft. Good for high head pressure, low flow applications.

Neptune

Hydraulically actuated diaphragm metering pumps for chemical injection, polymer injection and boiler/cooling system chemical metering. Capacities to 600 gph and maximum discharge pressures to 3000 psi. Electric stroke control available.

PRICE PUMP

Cast iron, bronze, 316SS and Hastelloy C centrifugal pumps available as close coupled or pedestal mount. Flows to 500 gpm, heads to 300 ft. Self priming, vertical short-setting sump and high pressure multi-stage designs also available.

TEIKOKU

Sealless, leakproof canned motor centrifugal pumps. Available in 304 & 316SS, Alloy 20 and Hastelloy. Nominal hp ratings available from 1 to 230. Temperatures from -325°F to 840°F. Flows to 3,000 gpm, heads to 1,650 ft with multi-stage design; system pressures to 5,000 psi. All pumps available in both horizontal and vertical configurations. ANSI and API designs with self-contained bearing diagnostics.

WALCHEM

Electronic solenoid drive metering pumps with outputs to 20 gph, pressures to 250 psi. Doses at 360 spm, turndown ratios up to 1800:1. Various material liquid ends, PP, PVC, PVDF and stainless. Waterproof models available. Standard 2-year warranty on liquid end. Mechanically actuated diaphragm pumps with outputs to 114 gph, pressures to 225 psi. PVC, PVDF, and stainless pump heads, single or three phase power.

WATER TREATMENT & RELATED PROCESS EQUIPMENT

WALCHEM

pH, ORP and conductivity controllers for cooling tower, boiler, and wastewater treatment. Single or dual inputs, wall or panel mount. Also specialty electroless nickel and copper controllers for the plating and printed circuit board industries. Comprehensive line of sensors, electrodes, ultrasonic level sensors and accessories.

WebMaster®
WALCHEM

Water treatment controllers based on multiple input/output platform. Couples cooling tower/boiler water control with server on-demand technology; automatic data logging. Ability to monitor and control water treatment from any computer, anywhere in the world with a standard web browser. No proprietary software required - safe/secure access. Four direct sensor inputs for pH, ORP and conductivity which can be configured specifically to match system requirements. Industrial model also available for process and wastewater applications.

**BALDOR
MOTORS AND DRIVES**

Electric motors: Open drip proof, totally enclosed fan cooled and explosion proof. AC, DC, inverter duty, food processing, wash down, and stainless steel. Variable frequency drives and motors also available.

BIACOH
FLUID CONTROL



Surge/pulsation suppression devices. Protects piping systems from destructive pulsations, surges and water hammer. Variety of sizes and materials available. Spill-STOP diaphragm rupture detectors and gauge isolators also available.

Neptune

Portable mixers, clamp or base mount, variety of industrial applications, 1 to 25,000 cps velocity. Various materials available. Mixing paints, dyes and chemical batch preparations. Speeds up to 1750 RPM.

TPE offers custom turnkey pump systems built in-house to meet your specifications; from the simple to the complex. All systems are fully tested prior to shipment. CAD drawings and full documentation services available. Typical applications include:

- Chemical injection systems – pH control, corrosion/scale/biological inhibitors, disinfection/deodorization and defoamers
- Closed loop sampling systems
- Cooling tower/boiler equipment packages
- Sample process recovery systems
- Fertigation packages
- Polymer make-up & feed skids

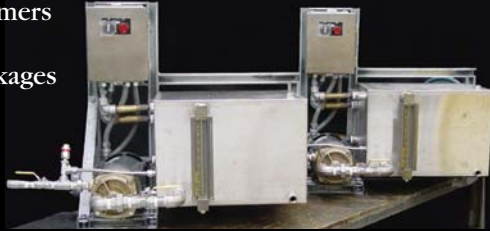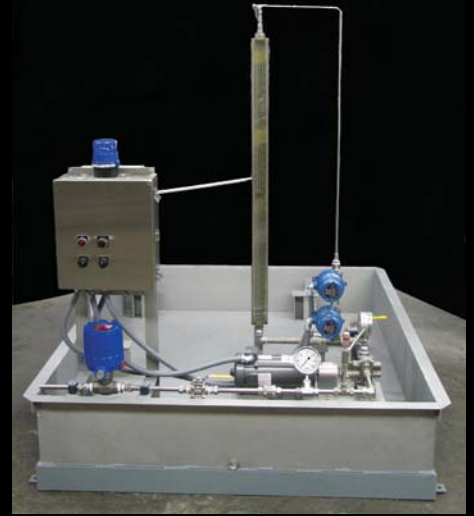

In-house services also include; base plate mounting, controls and drives for all pumps. Custom flange welding by our ASME certified welders.



TPE is the only factory authorized service and repair center for Chempump & Teikoku canned motor pumps. Rebuilding, or modification, to factory specifications. Underwriters Laboratory listed facility. Additionally, TPE provides factory authorized service for all of its distributed products from service centers located in Houston and Dallas.

HOUSTON

5880 Bingle Road • Houston, Texas 77092
Tel: 713.460.5555 • Fax: 713.460.4807
Toll-free: 800.828.4114

DALLAS

10715 Harry Hines Blvd. • Dallas, Texas 75220
Tel: 214.902.8077 • Fax: 214.902.8076
Toll-free: 800.346.5501

TPE
TEXAS
PROCESS
EQUIPMENT

ISO 9001:2000

**SEND US YOUR APPLICATION
VIA OUR ONLINE DATASHEET**

WWW.TEXASPROCESS.COM

SALES@TEXPROC.COM